

RF Remote Controller - Black

WR-8114-RC-W



LIVE SIMPLE
LIVE SMART

Description

Wretro's RF Remote Control is a sleek device with elegant design meant for your classic house. Control lights, fans, power sockets, curtains and much more through Wretro's Remote. The remote works on RF technology so it doesn't need to be directed towards the appliance for its operation and can work within the range of 50-60 meters.


Main Features

- 1) Sleek Design.
- 2) Control & Customize upto 30 switches, 6 Scenes.
- 3) 50 Meter Range.
- 4) Two-way Communication, ON-OFF State Indicator.
- 5) Dimmer Keys (Adjusting the brightness of terminal nodes).

Installation of Remote Control - Battery

Remote control battery box is equipped with a new battery, you can use it after removing the protective film of the battery.

If you find the indicator dimmed and the RF range shorten, please replace the battery with a new Li-Mn button cell (CR2450).

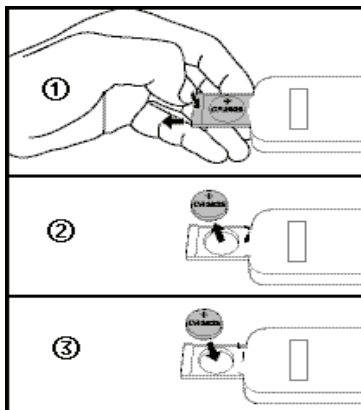


Method for replacing the battery:

1. Press the catching groove of remote control and pull out the battery box.
2. Put a CR2450 type Li-Mn button cell.
3. Close the battery box.

This remote control is comprised of indicators and 7 types of keys:

- ① **Busy Indicator** (Indicator flickers, indicating the remote control is busy in processing, transmitting or receiving data).
- ② **ON-OFF State Indicator** (Showing the on-off state of the remote controlled terminal nodes. Long press the single key, When the light is on, it means that the current state of terminal node is on; When the light is off, then the current state of terminal is off).
- ③ **Setup Key** (Being used for binding and unbinding the remote control with the remote-controlled terminal nodes).
- ④ **Scene Keys** (6 keys included, one key controls the combinational on-off state of multiple terminal nodes.)
- ⑤ **Single Keys** (30 keys included, one key controls the on-off state of single terminal node).
- ⑥ **Dimmer Keys** (Adjusting the speed/brightness of fans/lights).

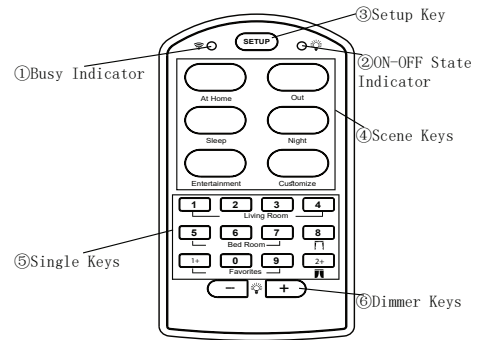

WR-8114-RC-W

Technical Parameters

Power Supply	3VDC, one piece CR2450 Li-Mn button cell
Standby Current	≤5uA
Wireless Operating Frequency	433MHz
Wireless Transmit Power	~10dbm
Wireless Receiving Sensitivity	≤-105dbm
RF Control Range	about 30m indoor, about 80m outdoor.
Maximum Quantity of Controllable Devices	30
Operating Temperature	0-60℃
Relative Humidity	≤80% (Non- condensing)
Dimension(L* W * H)`	99mm * 52mm * 12mm
Weight	38~45g