

Socket Module With Repeater

WR-6201-SMR



**LIVE SIMPLE
LIVE SMART**


Description

Wretro's Socket Module with Repeater transforms your traditional sockets into a smart socket by installing the module with traditional switches inside the gangbox. It also has the built-in RF signal repeater through which the range can be extended upto 80 meters. It is a four-way, fully digital communication smart module which helps to automate the traditional socket and operate appliances connected to it through Wretro's remote, mobile app and voice (Alexa).

Main Features

- 1) On-Off control.
- 2) Maximum current: 10A.
- 3) New generation four-way communication device that can penetrate the walls with fast response speed.
- 4) High reliability and strong anti-interference capability.
- 5) Can be used with traditional switches.
- 6) Can be used with Smart RF remote control/App/Voice.
- 7) The shell is made by high quality environmental protection flame retardant materials.
- 8) The RF signal range can be extended upto 80 meters.

Product Wiring Diagram

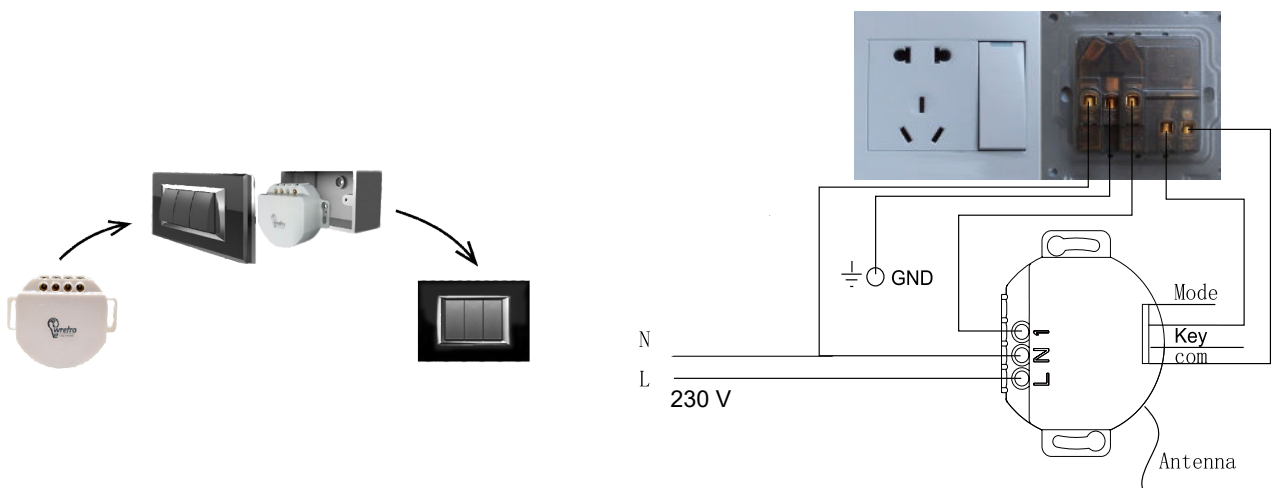

Technical Parameters

| | |
|--------------------------------|---|
| Power Supply | 110 - 230V AC |
| Standby Power Consumption | ≤0.3W |
| Wireless Operating Frequency | 433MHz |
| Wireless Transmit Power | ~10dbm |
| Wireless Receiving Sensitivity | ≤-105dbm |
| Maximum Load Current | ≤10A |
| Mounting Box Size | >77mm*77mm*45mm Please test before installation |
| Working Temperature | 0 ~ 60℃ |
| Environment Humidity | ≤80% (Non-condensing) |
| Dimensions (L * W * H) | Without Ears: 51.5mm*52mm*23.5mm With Ears: 67mm*52mm*23.5mm |
| Weight | 60g |

Please Note

- 1) Please hire professional electrician to install or disassemble the switches.
The power must be cut off before installing or disassembling.
- 2) The modules are forbidden to be installed in outdoors and other humid environments.