


Pulse Module

WR-6401-PM

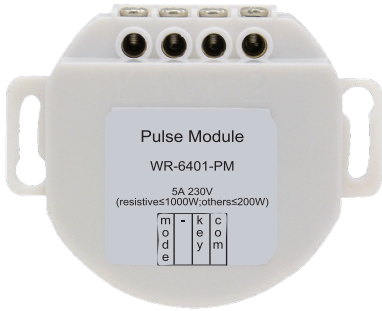

LIVE SIMPLE
LIVE SMART


Description

Wretro's Pulse Module enables an electromechanical and electromagnetic lock into a smart lock by connecting the module with the traditional manual switch. Pulse Module is a four-way fully digital communication smart module which enables you to lock and unlock your doors via Wretro's remote, mobile app or just by your voice.

Main Features

- 1) Open the EM / Digital door locks via Remote Control / App.
- 2) New generation four-way communication device that can penetrate the walls with fast response speed.
- 3) High reliability and strong anti-interference capability.
- 4) Can be used with traditional switches.

Product Wiring Diagram

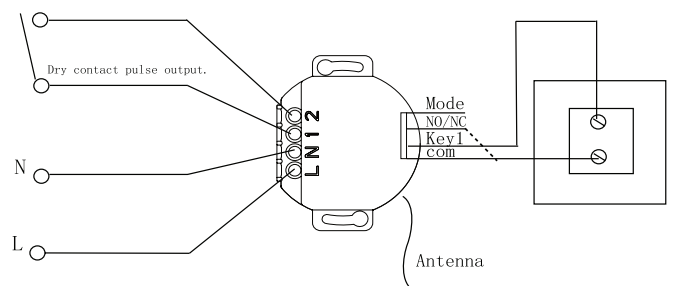

For common traditional switches

Technical Parameters

Power Supply	110 - 230VAC
Standby Power Consumption	≤0.3W
Wireless Operating Frequency	433MHz
Wireless Transmit Power	~10dbm
Wireless Receiving Sensitivity	≤-105dbm
Output	12V, Dry contact output
Output Delay	1 s
Mounting Box Size	>77mm*77mm*50mm Please test before installation
Working Temperature	0-60°C
Relative Humidity	≤80% Non-condensing
Dimensions (L * W * H)	Without Ears: 51.5mm*52mm*23.5mm With Ears: 67mm*52mm*23.5mm
Weight	60g

Please Note

- 1) Please hire professional electrician to install or disassemble the switches.
The power must be cut off before installing or disassembling.
- 2) The modules are forbidden to be installed in outdoors and other humid environments.