

2 Gang Module

WR-6102-GM



LIVE SIMPLE
LIVE SMART


Description

Wretro's 2 Gang Module is a smart device that can be deployed in traditional switches. All you have to do is install the device in the gangbox for two switches in your house to transform them into a fully automated system that can be controlled by a remote, mobile app or just by your voice.

Main Features

- 1) On-Off control.
- 2) New generation four-way communication device that can penetrate the walls with fast response speed.
- 3) High reliability and strong anti-interference capability.
- 4) Can be used with traditional switches.
- 5) Can be used with Smart RF remote control / Mobile App / Voice.

Product Wiring Diagram

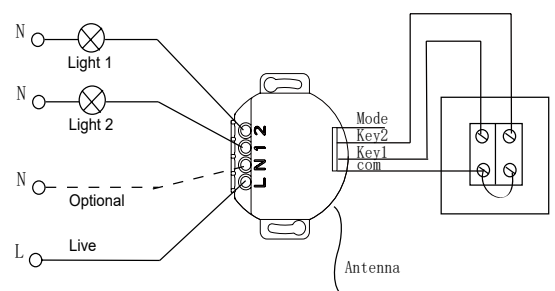

Technical Parameters

| | |
|--------------------------------|--|
| Power Supply | 110 - 230VAC |
| Standby Power Consumption | ≤30mW |
| Wireless Operating Frequency | 433MHz |
| Wireless Transmit Power | ~10dbm |
| Wireless Receiving Sensitivity | ≤-105dbm |
| Total Load Power | Resistive Load: <1000W Others: ≤200W |
| Minimum Load Power | 5W(Only for single-wire wiring method, double-wire wiring method without limit) |
| Mounting Box Size | >77mm*77mm*50mm Please test before installation |
| Working Temperature | 0-60°C |
| Relative Humidity | ≤80% (Non-condensing) |
| Dimensions (L * W * H) | Without Ears: 51.5mm*52mm*23.5mm With Ears: 67mm*52mm*23.5mm |
| Weight | 60g |

Please Note

- 1) Please hire professional electrician to install or disassemble the modules. The power must be cut off before installing or disassembling.
- 2) The modules are forbidden to be installed in outdoors and other humid environments.