

Smart RF 1 Gang Curtain Switch - White

WR-7301-CS-W



Description

Wretro's Smart RF 1 Gang Curtain Switch is a four-way fully digital communication smart switch which is aesthetically designed for single panel curtain track. Smart RF 1 Gang Curtain switch lets you control your curtains with individual open, close and stop button, through Wretro's remote, mobile app and Voice Command (Alexa).



Trendy touch screen panels are sleek and elegant that are meant for the millennial lifestyle.

LIVE SIMPLE
LIVE SMART

Main Features

- 1) Stylish Design.
- 2) Capacitive Touch.
- 3) Ultra-Low standby power consumptions.
- 4) Maximum Motor power: 200W.
- 5) Smart Touch Switches can be operated via Touch/Remote Control/App/Voice.
- 6) Control Curtains (Open/Close/Stop).
- 7) New generation four-way communication device that can penetrate the walls with fast response speed.
- 8) High reliability and strong anti-interference capability.

Product Wiring Diagram

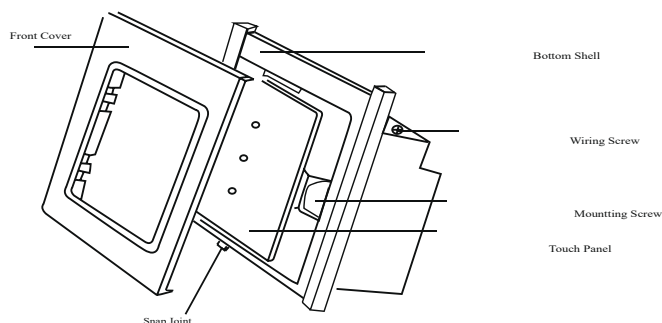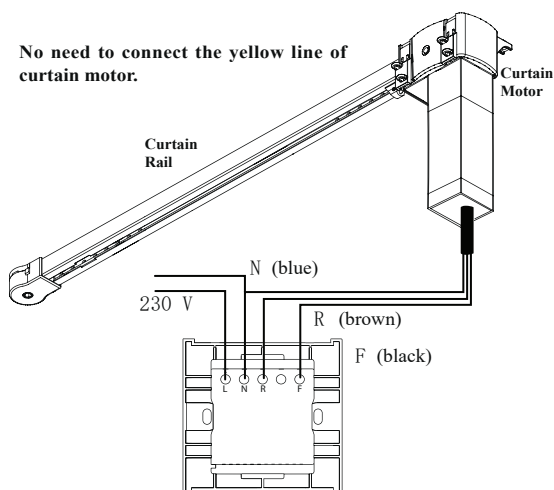

Technical Parameters

Power Supply	110 ~ 230V AC
Curtain Motor Compatibility	Min. 4 core wires
Standby Power Consumption	≤0.3W
Wireless Operating Frequency	433MHz
Wireless Transmit Power	~10dbm
Wireless Receiving Sensitivity	≤-105dbm
Mounting Box Size	77mm*77mm*38mm
Working Temperature	0~60°C
Environment Humidity	≤80% (Non-condensing)
Dimensions (L * W * H)	86mm×86mm×37mm
Weight	135g

Please Note

- 1) Please hire professional electrician to install or disassemble the switches. The power must be cut off before installing or disassembling.
- 2) The switches are forbidden to be installed in outdoors, bathroom and other humid environments.