


Smart RF 2 Gang Curtain Switch - Black

WR-7302-CS-B



Description



Wretro Smart RF 2 Gang curtain Switch is a four-way fully digital communication smart switch aesthetically designed for dual panel curtain track. Smart RF 2 Gang curtain switch lets you control dual curtains with individual open, close and stop button and even through wretro's remote and mobile app. Smart RF 2 Gang curtain Switch is designed for Trendy touch screen panels are sleek and elegant meant for the millennial lifestyle.

LIVE SIMPLE
LIVE SMART

Main Features

- 1) Stylish Design.
- 2) Capacitive Touch.
- 3) Ultra-Low standby power consumptions.
- 4) Maximum Motor power: 200W.
- 5) Smart Touch Switches can be operated via Touch / Remote Control / App / Voice.
- 6) Curtain can be Open / Close / Stop.
- 7) New generation four-way communication device that can penetrate the walls with fast response speed.
- 8) High reliability and strong anti-interference capability.

Product Wiring Diagram

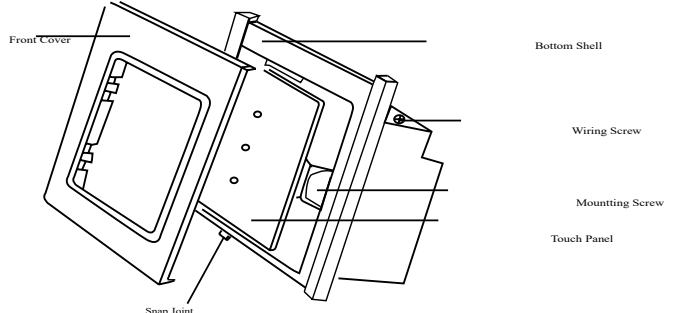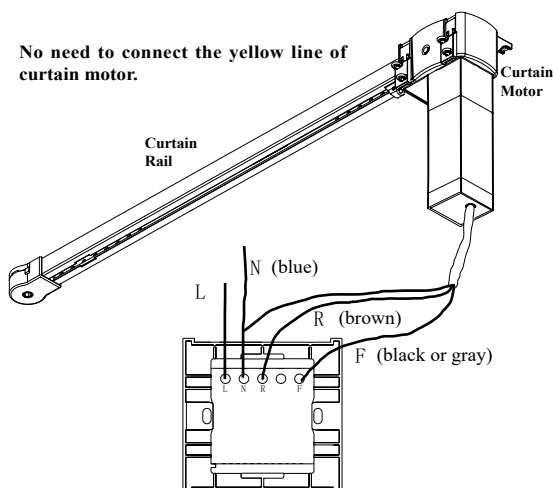

Technical Parameters

Power Supply	110 ~ 250VAC
Standby Power Consumption	≤0.3W
Wireless Operating Frequency	433MHz
Wireless Transmit Power	~10dbm
Wireless Receiving Sensitivity	≤-105dbm
Mounting Box Size	77mm*77mm*38mm
Working Temperature	0~60°C
Environment Humidity	≤80% (Non-condensing)
Dimensions (L * W * H)	86mm×86mm×37mm
Weight	135g

Notice

- 1) Please hire professional electrician to install or disassemble the switches.
The power must be cut off before installing or disassembling.
- 2) The switches are forbidden to be installed in outdoors and other humid environments.