

2 Gang Module

WR-6102-GM



LIVE SIMPLE
LIVE SMART

Description


Wretro 2 Gang Module transforms traditional switch into a smart switch by connecting and installing the module with traditional switches inside the gangbox .

The module is a four-way fully digital communication device and you can easily control and query the on-off state of the switch with the help of Wretro's remote and mobile app.

Main Features

- 1) On-off control.
- 2) New generation four-way communication device that can penetrate the walls with fast response speed.
- 3) High reliability and strong anti-interference capability.
- 4) Can be used with your traditional switches.
- 5) Can be used with Smart Rf remote control / App / Voice Control.
- 6) 2 gang module is a patent 16A technology with high power and impact resistance.

Product Wiring Diagram

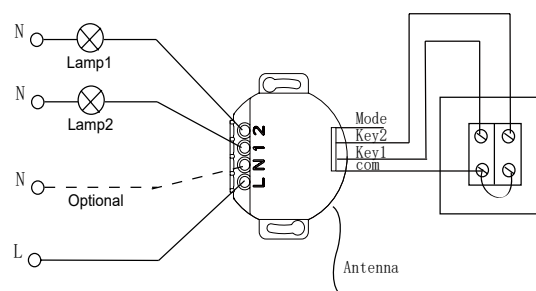

Technical Parameters

Power Supply	110 - 250VAC
Standby Power Consumption	≤30mW
Wireless Operating Frequency	433MHz
Wireless Transmit Power	~10dbm
Wireless Receiving Sensitivity	≤-105dbm
Total Load Power	Resistive Load: <1000W Capacitive Load: < 200W Inductive Load: <300W
Minimum Load Power	5W(Only for single-wire wiring method, double-wire wiring method without limit)
Mounting Box Size	>77mm*77mm*50mm Please test before installation
Working Temperature	0-60°C
Relative Humidity	≤80% (Non-condensing)
Dimensions (L * W * H)	Without Ears: 51.5mm*52mm*23.5mm With Ears: 67mm*52mm*23.5mm
Weight	60g

Notice

- 1) Please hire professional electrician to install or disassemble the modules.
The power must be cut off before installing or disassembling.
- 2) The modules are forbidden to be installed in outdoors and other humid environments.